



T09N-R02W-34_0000_MCS

NORTHEAST CORNER
 NORTHEAST QUARTER
 SEC 34, T9N, R2W
 MONROE CO., IND

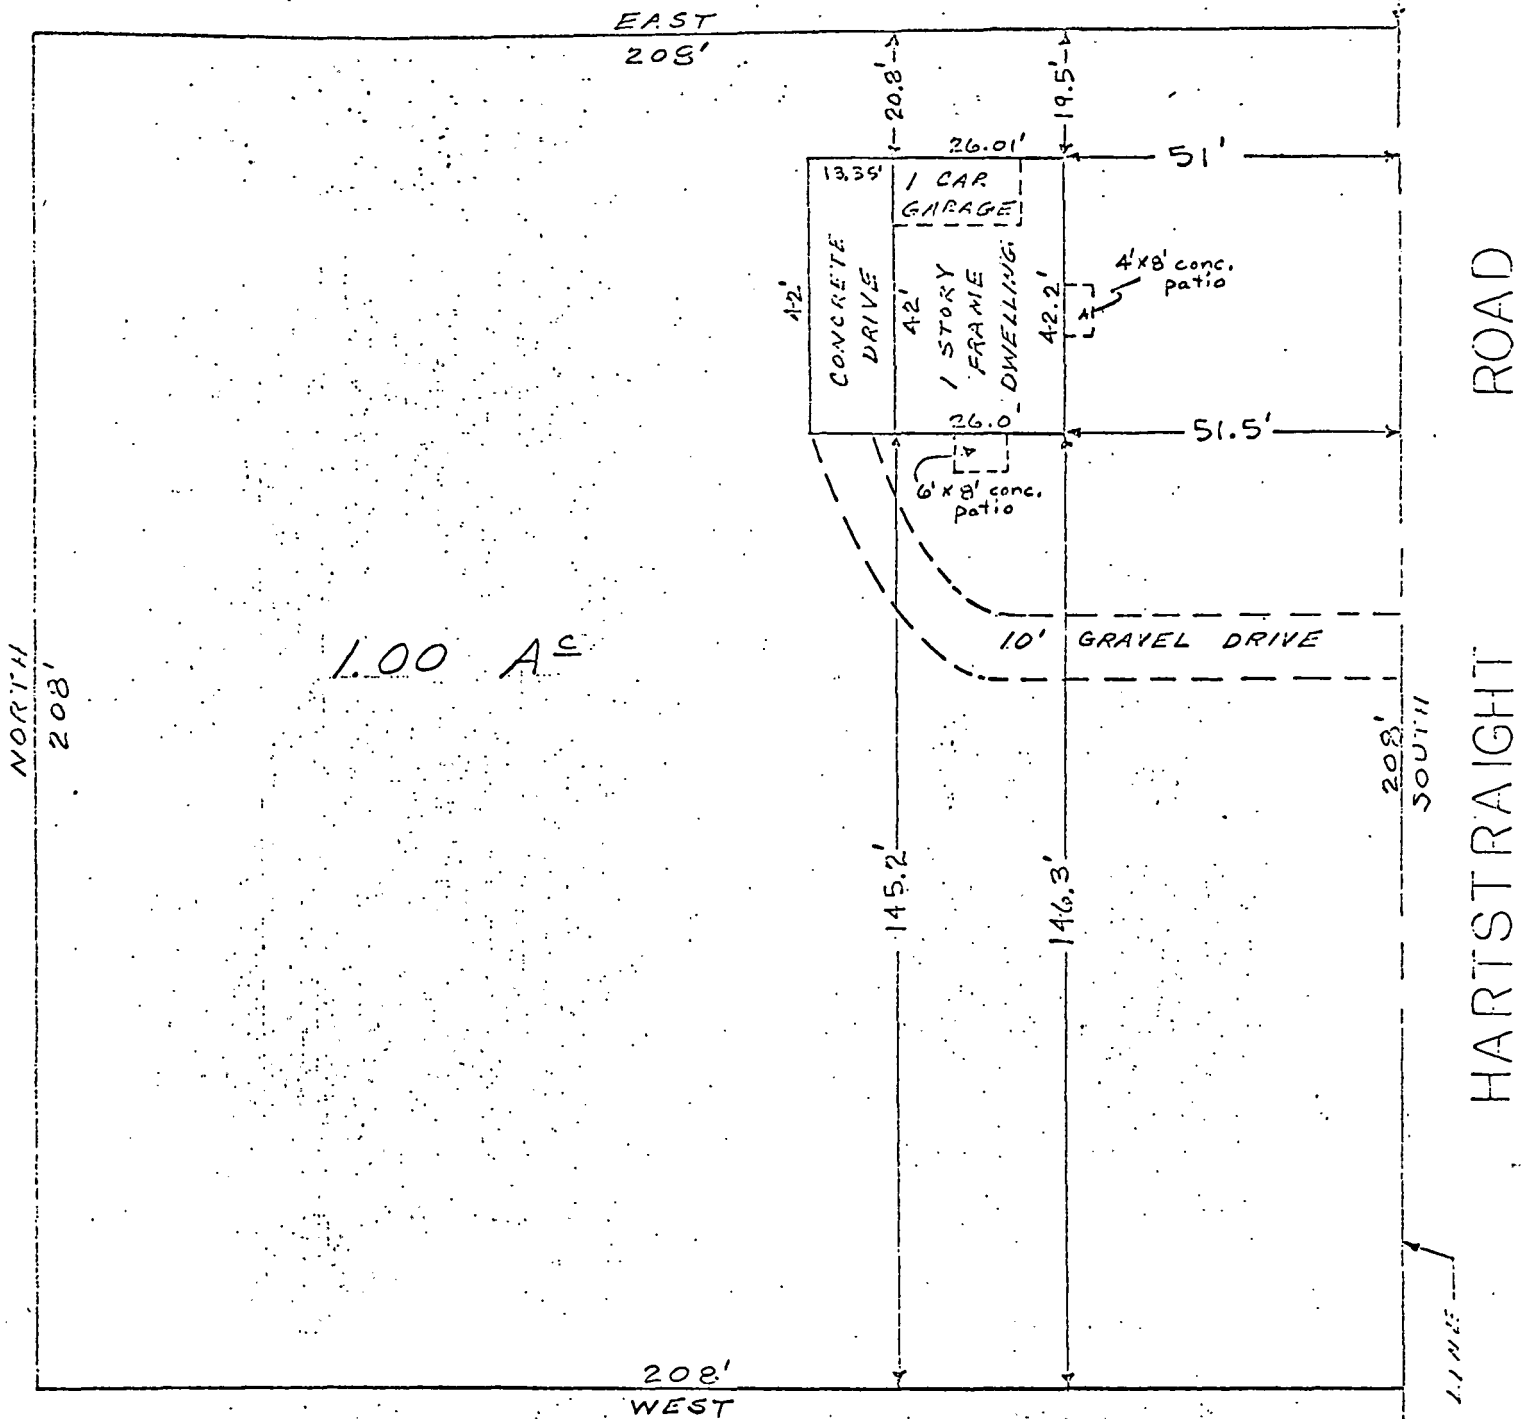

DONALD & VIRGINIA HANNA

MAY 17, 1977



SCALE 1"=30'

Lee Utt, R. L. S. # S0089, Indiana

L. A. Jacobs
 R. A. Jacobs



CERTIFICATE OF SURVEY

State of Indiana
County of Monroe SS:

I, Lee Utt, duly licensed Land Surveyor No. S0089, do hereby certify that the attached Plat is a true and correct survey of real estate described as follows, to-wit:


One square acre out of the Northeast quarter of the Northeast quarter of Section Thirty-four (34), Township 9 North, Range 2 West, described as follows, to-wit:

Beginning at a point Four Hundred Sixteen (416) feet South of the Northeast corner of the Northeast quarter of Section Thirty-four (34), Township 9 North, Range 2 West; thence South Two Hundred Eight (208) feet; thence West Two Hundred Eight (208) feet; thence North Two Hundred Eight (208) feet; thence East Two Hundred Eight (208) feet to the place of beginning. Containing One square acre, more or less.



I further certify that:


1. All improvements on said tract are shown on the attached Plat and lie within boundaries of said tract.
2. There are no encroachments upon the described tract by any improvements appurtenant to adjoining tracts.

In witness whereof I have hereunto attached my hand and seal at
Bloomington, Indiana this 17th day of May, 1977.




Lee Utt, R. L. S. # S0089, Indiana




WIDE 100'

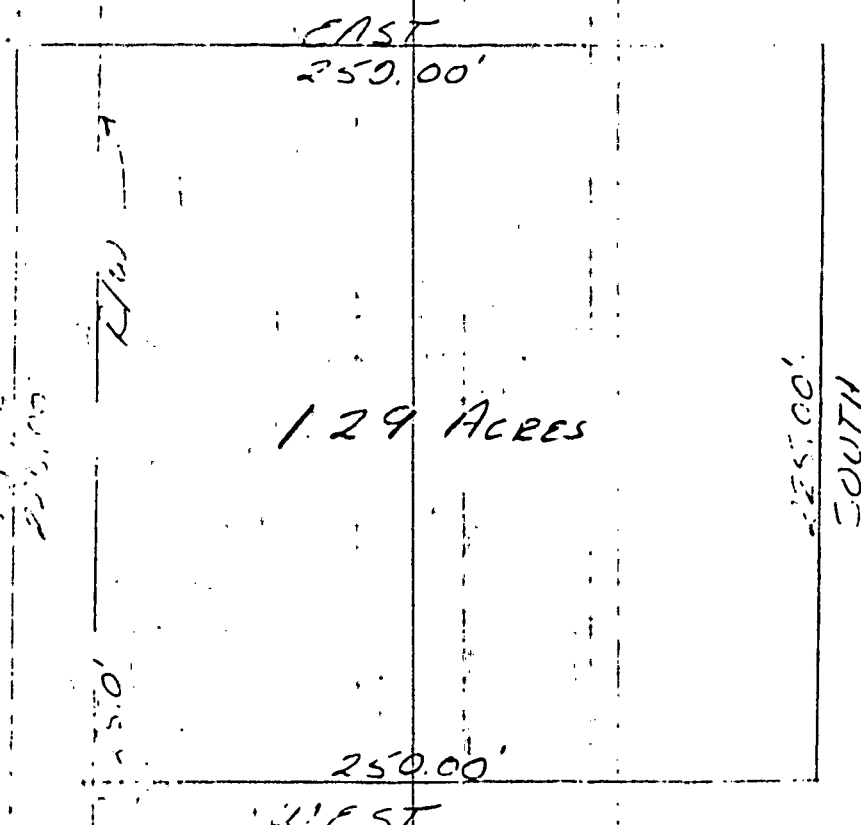

SECTION:
 Part of the Southeast quarter of Section 34, Township 7 North, Range 2
 Morris County, Indiana; bounded and described as follows: beginning at
 the southwest corner of said Southeast quarter in said Section 34 and in the
 centerline of Oard Road, thence leaving said centerline and running East for
 250.00 feet, thence South for 225.00 feet, thence West for 250.00 feet and to
 the centerline of said Oard Road, thence with said centerline North for 225.00
 feet to the point of beginning. Containing in all 1.29 acres, more or less.
 Subject to a 25.00 foot easement from the centerline of Oard Road for County
 right-of-way.

Raymond Graham
 Raymond Graham
 R.P.E. 5109 L.S. 9975 Indiana
 3215 N. Smith Pike
 Bloomington, Indiana
 November 17, 1981

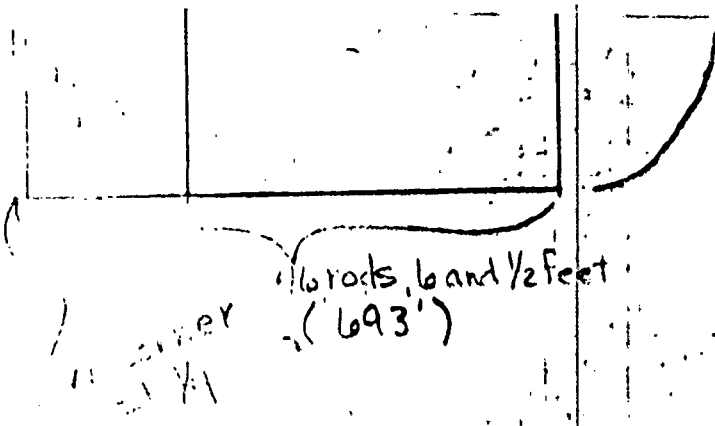

50.5
3.11
53.61

NW cor.
SE 1/4
S34 T9N R2W
(60 rods
(990'))

1.21
ac.

28.5 ac

HAYFIELD
CEMETARY
1.5 ac.

22 ac.

160 Rods
(2640')


6 rods, 6 and 1/2 feet
(693')

corner
S34 T9N

(1698.18') 102 R. 23 L. NORTH
 (425.04') 25 R. 19 L. EAST
 SW CORNER SE 1/4
 SEC. 34
 T9N
 R2W


WADE HORN

OCCUPIED
 GRAVEYARD

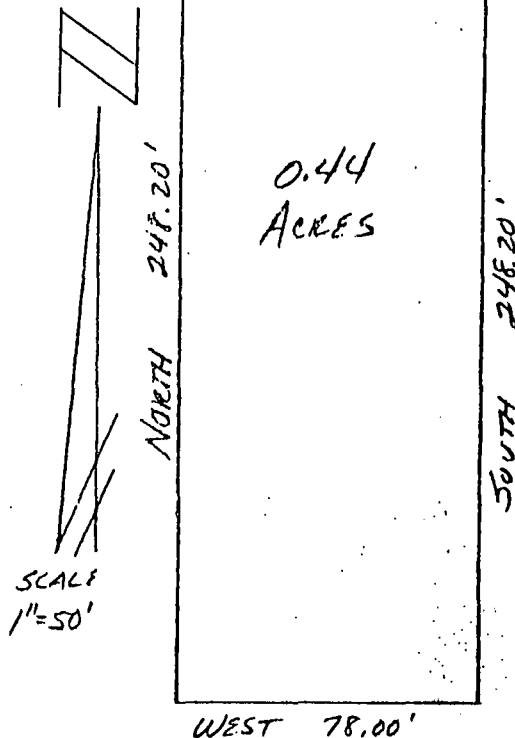

Section 34


DESCRIPTION:
 A part of the Southeast quarter of Section 34, Township 9 North, Range 2 West, Monroe County, Indiana, described as follows: Beginning at a point that is 102 rods and 23 links (1698.18 feet) North and 25 rods and 19 links (425.04 feet) East of the Southwest corner of the said quarter section; thence running South for 248.20 feet; thence West for 78.00 feet; thence North for 248.20 feet; thence East for 78.00 feet and to the point of beginning. Containing in all 0.44 acres, more or less.



Raymond Graham
 RAYMOND GRAHAM
 R P E 8409 L S 9978 IND
 3215 N Smith Pike
 Bloomington, Indiana
 August 31, 1987

PLAT OF DESCRIPTIONS

GRAPHIC SCALE




(IN FEET)
1 inch = 100 ft.
120



*Book 34
Page 100*

Original 35.8 Ac. D.R. 115, P 383
Less 2.6 Ac.
33.2 Ac.
Plus 2.47
35.67 Ac. +/-

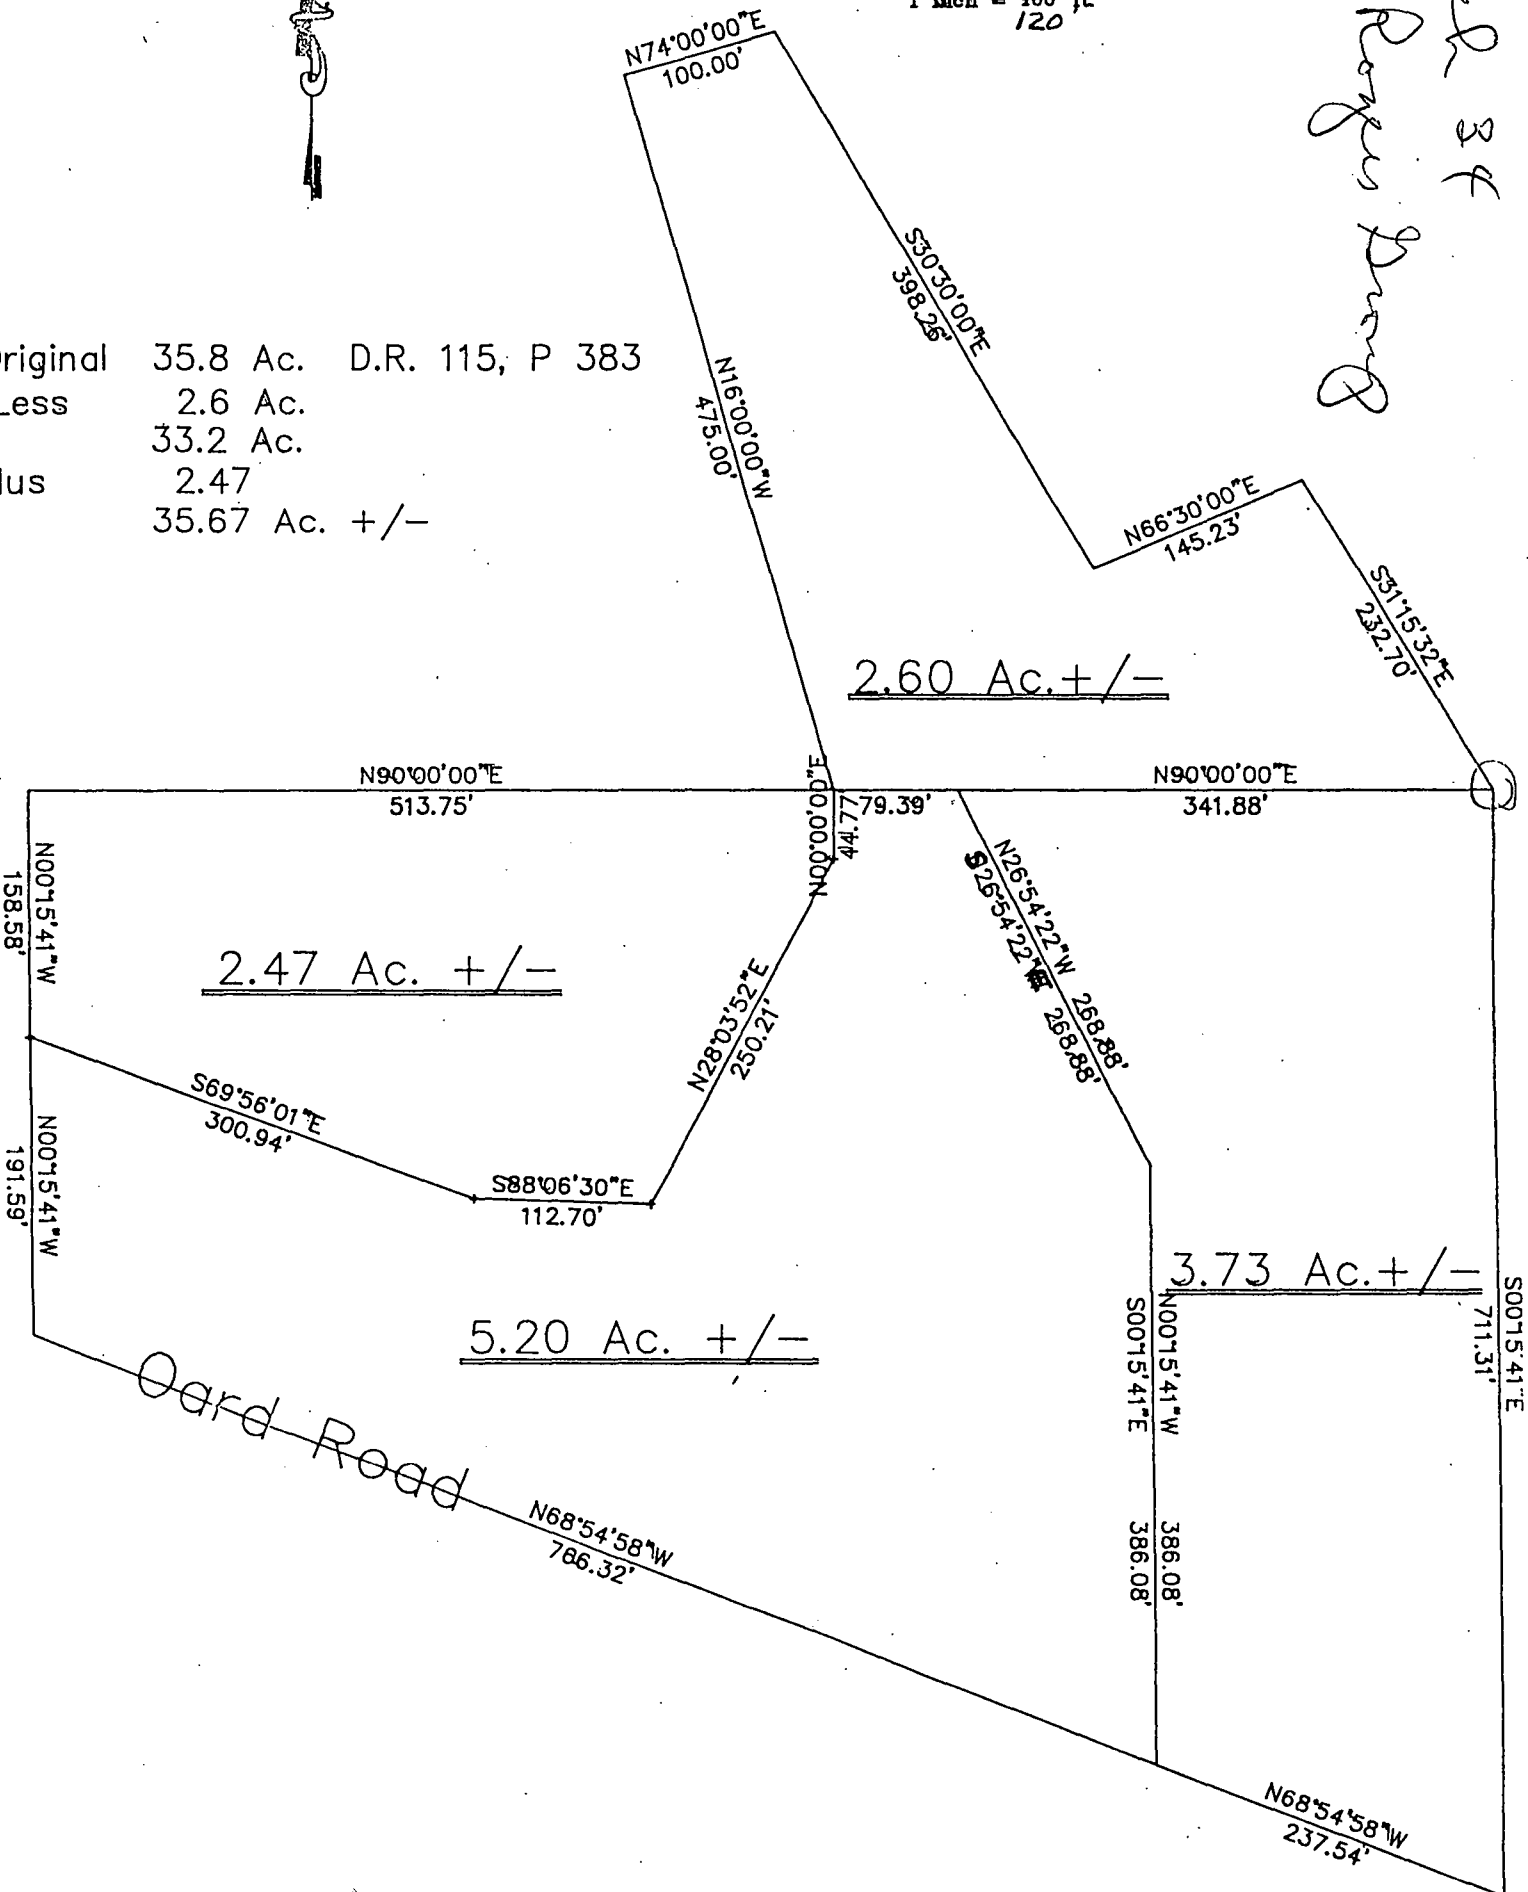

RICH 34-9-2W

PART N $\frac{1}{2}$, SE $\frac{1}{4}$ SECTION 34

TOWNSHIP 7 NORTH
RANGE 2 WEST,
MONROE COUNTY, INDIANA

SURVEYOR'S CERTIFICATE

I, STEVEN W. ARCHER, CERTIFY
THAT THIS PLAT REPRESENTS
A SURVEY COMPLETED ON
NOVEMBER 4, 1993
UNDER MY SUPERVISION


MONROE COUNTY, INDIANA

SURVEYOR'S CERTIFICATE

I, STEVEN W. ARCHER, CERTIFY
THAT THIS PLAT REPRESENTS
A SURVEY COMPLETED ON
NOVEMBER 4, 1993
UNDER MY SUPERVISION

PLAT PREPARED BY:

Steven W. Archer
STEVEN W. ARCHER
RLS 8700094




CLIENT / OWNER of RECORD

MARY P. BUNGE
DR 411 P. 500

BASIS of BEARING

ROTATED EAST LINE of
SECTION 34, T9N, R2W
TO NORTH


O - DENOTES $\frac{3}{8}$ " REBAR
"Y" CAP SET
Δ - DENOTES RE SPIKE SET

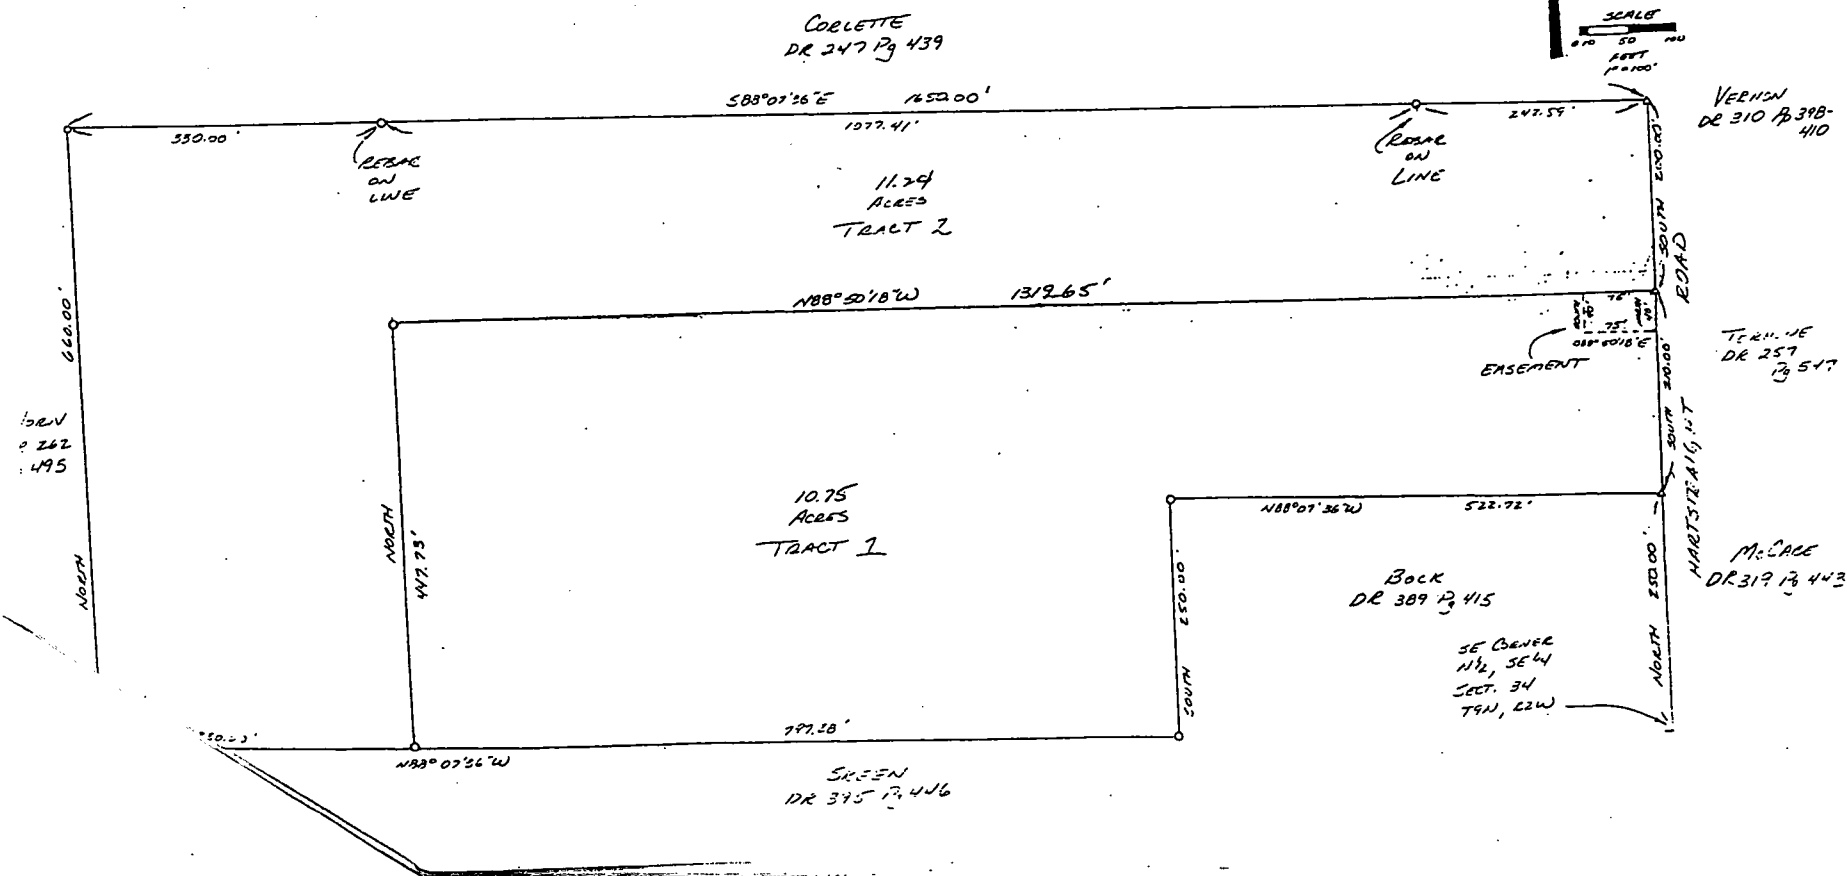

Wade Horn

007-18370-01
1-05
-18380-01
1-02

PK NAIL FOUND
NW CORNER, SE 1/4
SECTION 34, T 9N, R 2W

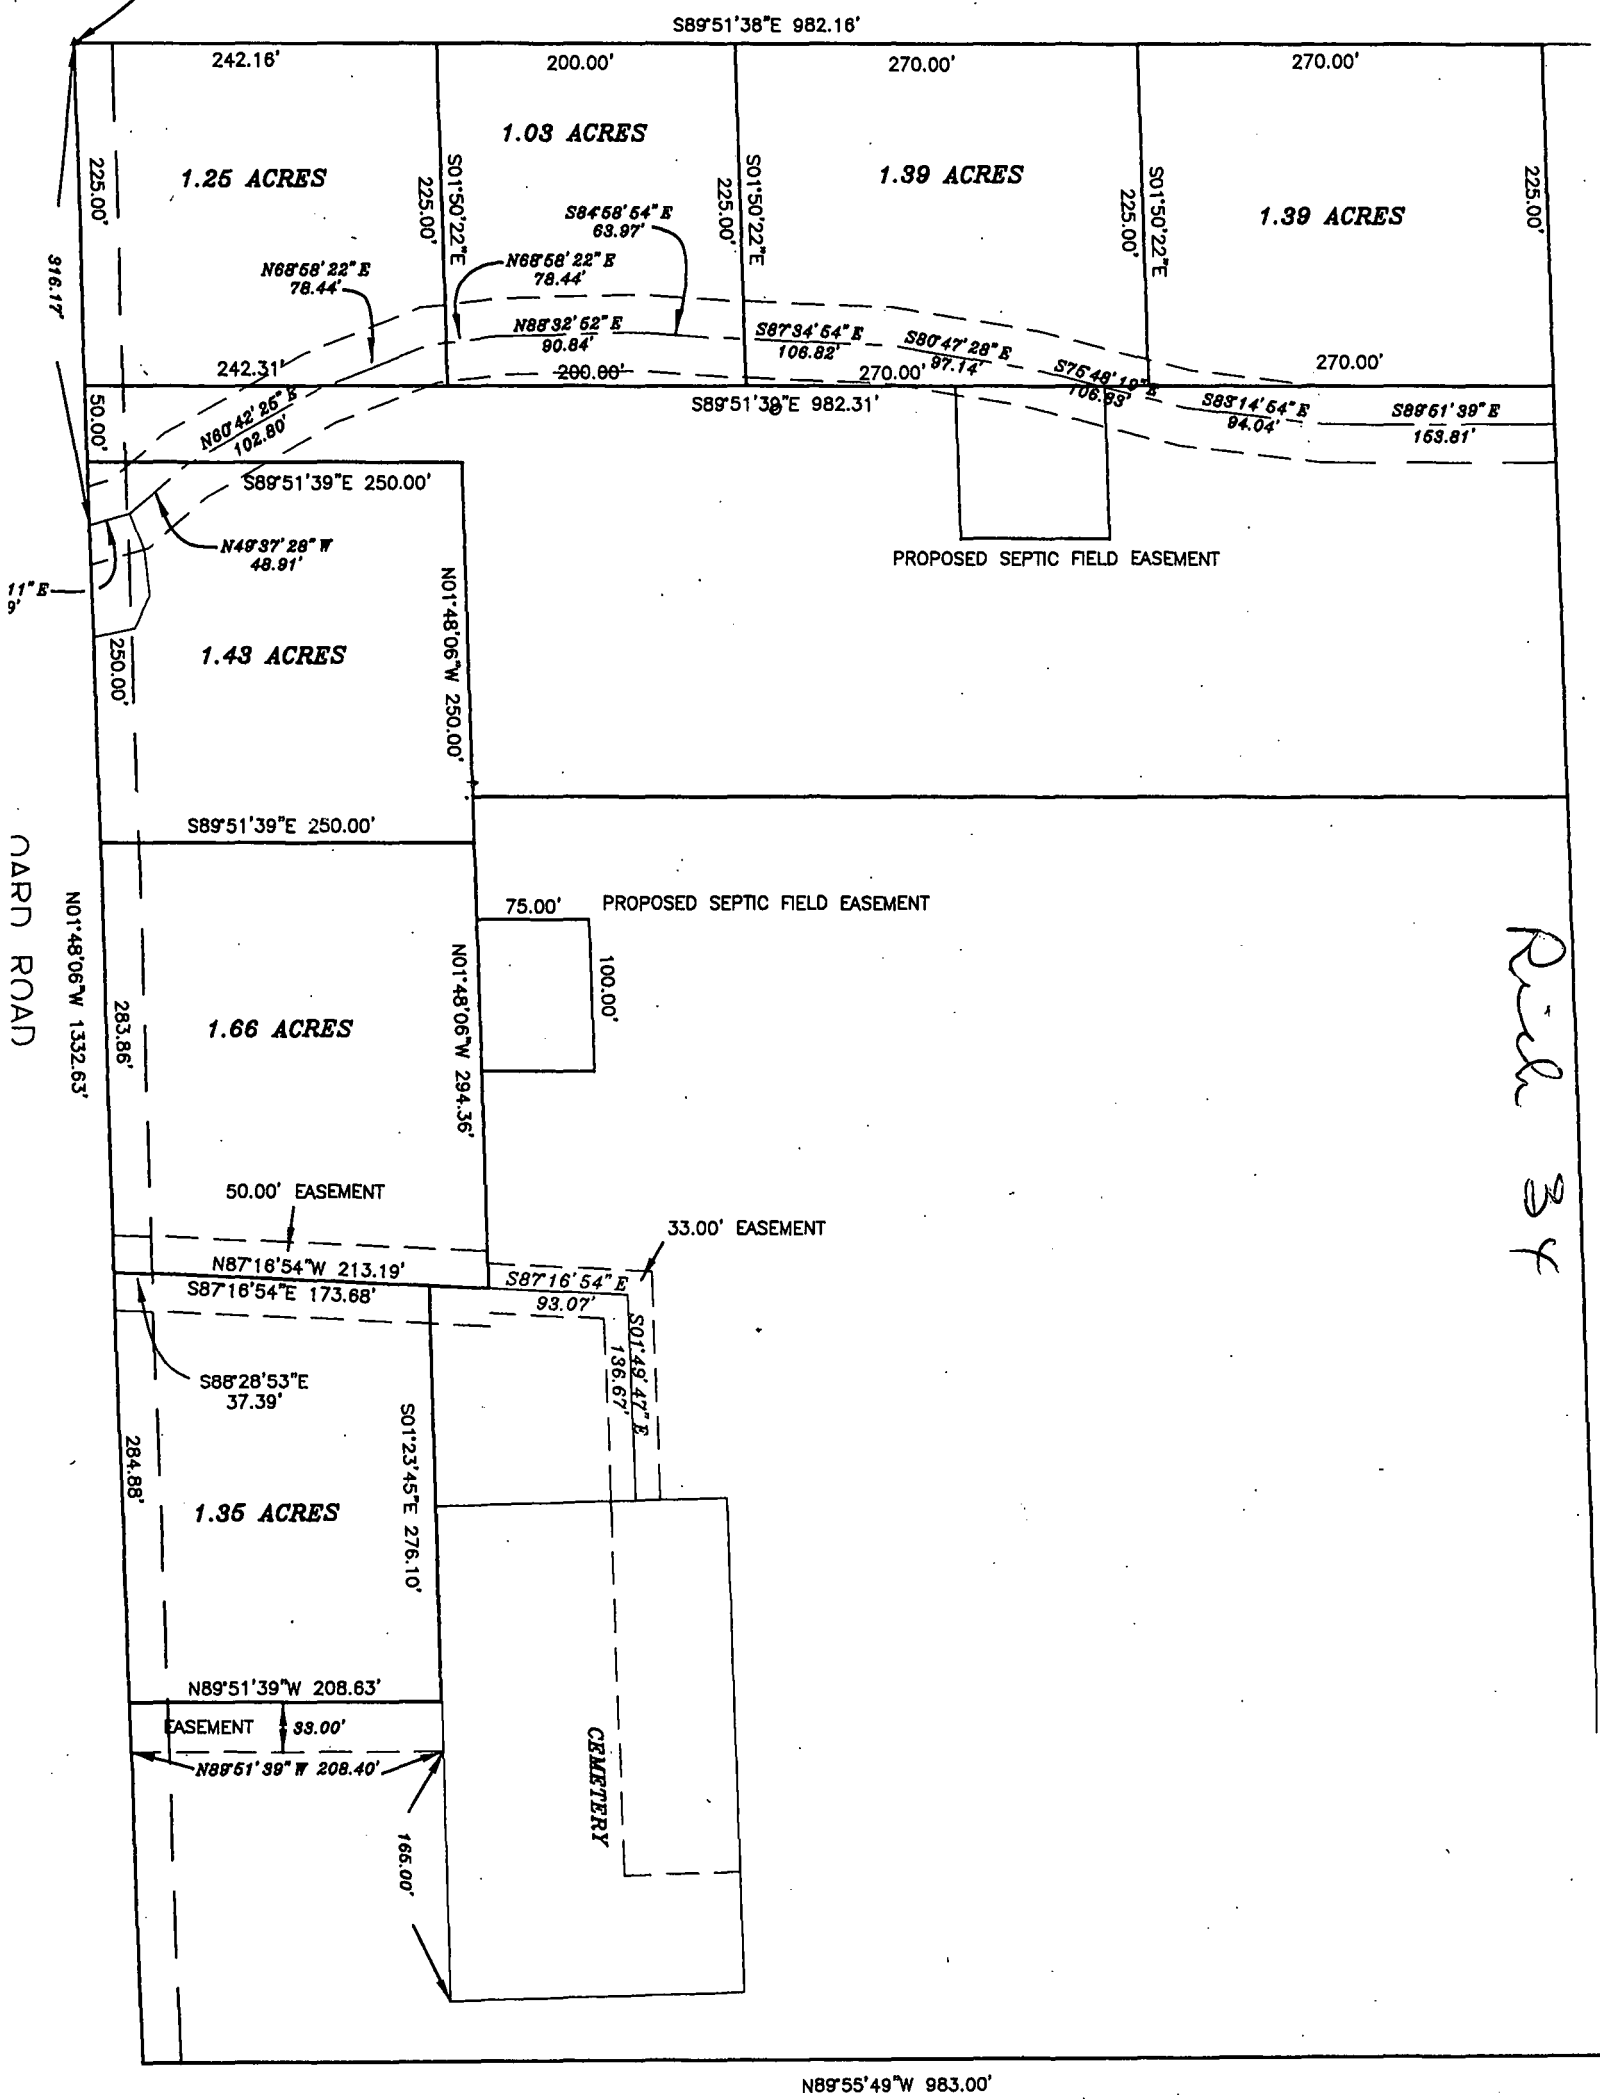


N89°55'49"W 983.00'

TRI CO SURVEYING & MAPPING

Edmund O. Fortas
Registered Land Surveyor

(812) 876-2305

P. O. Box 96
Ellettsville, Indiana 47429

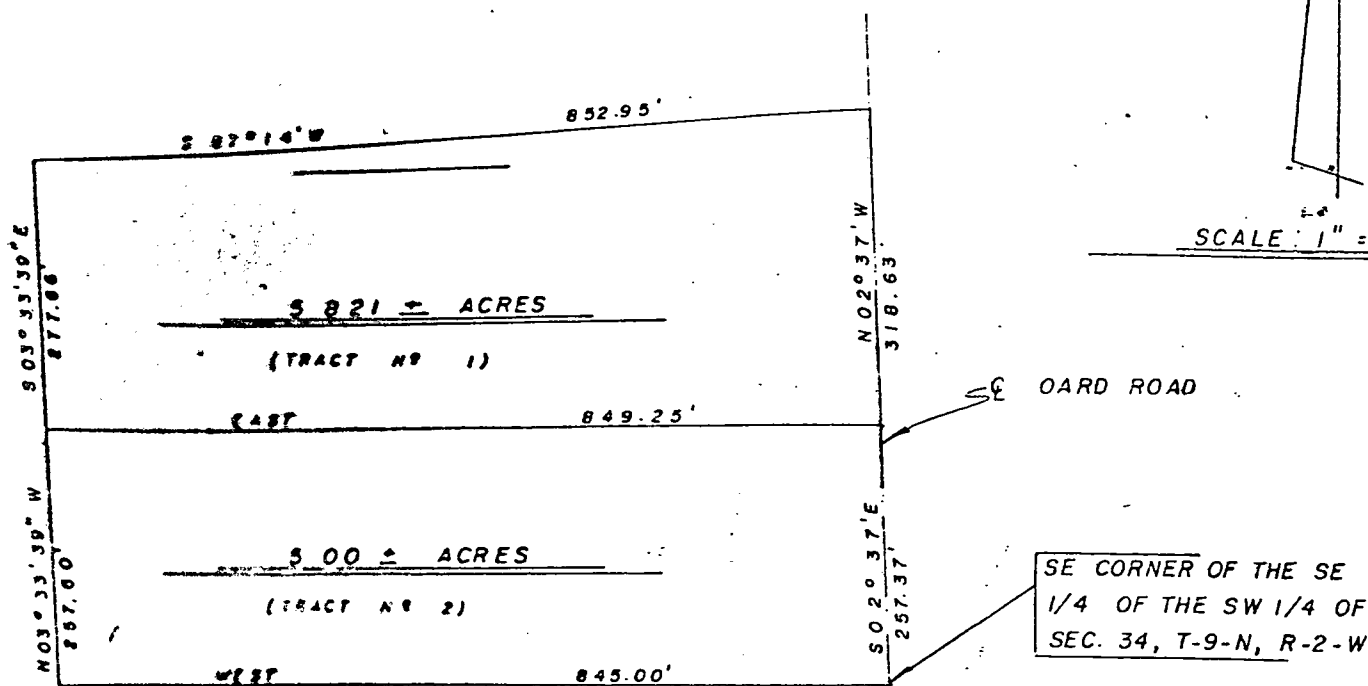

TRACT #1:

A part of the Southeast Quarter of the Southwest Quarter of Section Thirty-four (34), Township Nine (9) North, Range Two (2) West, Monroe County, Indiana, and more particularly described as follows:

Beginning North Two (02) Degrees and Thirty-seven (37) Minutes West 257.37 feet from the Southeast Corner of said Quarter Quarter Section and on the center line of Card Road, thence along said center line North Two (02) Degrees and Thirty-seven (37) Minutes West 318.63 feet to a fence, thence leaving said road and along said fence South Eighty-seven (87) Degrees and Fourteen (14) Minutes West 852.95 feet, thence along a fence South Three (03) Degrees and Thirty-three (33) Minutes and Thirty-nine (39) Seconds East 277.66 feet, thence leaving said fence East 849.25 feet to the place of beginning. CONTAINING 5.821 acres, more or less.

TRACT #2:

A part of the Southeast Quarter of the Southwest Quarter of Section Thirty-four (34), Township Nine (9) North, Range Two (2) West, Monroe County, Indiana, and more particularly described as follows:

Beginning at the Southeast Corner of said Quarter Quarter Section and on the center line of Card Road, thence leaving said center line and along an existing fence West 845.00 feet, thence along an existing fence North Three (03) Degrees and Thirty-three (33) Minutes and Thirty-nine (39) Seconds West 257.66 feet, thence leaving said fence East 849.25 feet to the center line of aforementioned Card Road, thence along said centerline South Two (02) Degrees and Thirty-seven (37) Minutes East 257.37 feet to the place of beginning. CONTAINING 5.00 acres, more or less.

The above descriptions were prepared from a survey conducted by Robert W. Fortas, Registered Land Surveyor, Ind. Reg. No. 6812, on the 31st of March, 1970.

Edmund O. Fortas
Registered Land Surveyor

April 18 & 19 1853

Surveyed for George Smith & others
in Section 27 T 10 R 1 W and established the
following corners

- (1) The Southern $\frac{1}{2}$ m post wit trees Birch 10 S 25° W 19 lks
Maple — N 80° W 15 "
- (2) Corner in center of Section wit trees White oak & 30 corner tree
- (3) Corner in center of N W gr wit trees Hickory 30 S 76° W 12 lks
Birch 5 S 27° W 13 "
- (4) N W corner of $\frac{1}{2}$ of S W gr wit trees Birch 14 corner tree
- (5) N W corner of $\frac{1}{2}$ of N W gr wit trees Sawin tree 2 S 22° E 4 "
- (6) Corner on the old boundary line between the East
and West halves of the South west gr
Wit trees Birch 14 S 71° E 29 "
- (7) N E cor of S E gr of N W gr wit trees Birch 12 N 40° W 30 "

E. Smith & } ch bearers
Nick Smith } sworn

James Woodburn
M.C.S.

April 20th 1853

Surveyed for Wm Anderson and others
in Section 35 T 10 R 1 W and established the
following corners The N E corner of the west half of N E
gr wit trees Sugar 10 N 31° W 33 lks Elm oak & N 52° E 35 lks
Also N W corner of west half of N E gr

- Wit trees Mulberry 3 in S 6° W 74 lks
- The east $\frac{1}{2}$ m corner witness Birch 8 S 16° W 33 lks
Birch 20 N 72° W 56 "
- The S E cor of N half of N E gr wit trees Birch 15 S 87° E 21 lks
Ash 4 N 76° W 4 "
- Corner at center of Section wit trees Dogwood 4 N 34° E 12 "
- The S E cor of W half of N W gr wit trees Birch 15 S 72° E 28 "
- " 14 N 19° W 28 "

Fred Smith } chain bearers
Robt. Smith } sworn

James Woodburn M.C.S.

Established for S Wier & Eli P Harmer the S E of Section
34 T 9 R 2 W witness trees Hick 18 S 56° W 52 lks
Hick 20 N 60° W 102 "

James Woodburn
M.C.S.

Sec 2 T9 R 1 W

| | | | |
|-------------|---------------|-----------|-----------|
| A | | B | |
| 50.11 | 50.11 | 50.11 | 50.11 |
| J. Jackson | John Campbell | Rawlings | C |
| 80.18 1/2 | 80.18 1/2 | 80.18 1/2 | 80.18 1/2 |
| Burns | E | D | Burns |
| H | | I | |
| 162 | 162 | 162 | 162 |
| L | | | |
| J. R. Lucas | | | |

X

Cor F' Beech 7. S77E 45 1/2. W. Oak 12. N69E 37 1/2.
 .. H Beech 2. N33E 3 1/4. Beech 4. N16E 5.
 .. I Iron Wood 3. N72W 10. Beech 16. S65E 6.
 .. L Apple 10. East 4 1/2. Apple 10. S50W 48 1/2.

Arch Fleener & Co
 John Jackson Sur

J. W. Spenser & Co Sur
 by J. Woodburn Depty.

Sec 34 T9 R 2 W

| | |
|----|--------|
| NW | NE |
| | D |
| SW | E |
| | Coffey |
| | Field |
| F | A |

July 1859 Surveyed in Sec 34 T9 R 2 W
 and established the following corners for
 Benj Field and C. Coffey.

Cor A Wt trees White Walnut 4. N30W 5 poles 21 1/2.
 .. B " " Sug 16. S45E 2 poles 18 1/2.
 .. C " " Beech 22. N31W 2 " 22 1/2.
 .. D " " Wild cherry 26. S65E 61 1/2 1/2.
 .. E " " Wild cherry 18. S77E 65 1/2.
 .. F " " W. Oak 30. S29E 71 1/2.
 .. G " " Sug 14. S44E 72 1/2.
 .. H " " Hick. 2. N25E 35.
 .. I " " Sug 1. S70E 17.
 .. J " " Sycamore 2. S8W 19.
 .. K " " Wild cherry 3. S80E 24 1/2.

B. Field & Co

C. Coffey Sur

J. W. Spenser & Co Sur
 by Jas Woodburn Depty.

Aug 21. 1859

X

Surveyed and established the S.E. and S.W. corners of a
 10 acre lot of the North End of the East 1/2 of S.W. 1/4 of Sec 6. T8 R 1 W.
 S.E. cor Wt trees. Beech 16. N65E 30 1/2. B. Wal. 6. West 33 1/2.
 S.W. " " " Beech 12. N30W 18 1/2. Hick 20. North 12.

J. W. Spenser & Co Sur
 by Jas Woodburn Depty.